



Z900RS / Z900RS CAFE OPTIONAL HEAT GUARD SET

Product information



Be sure to read the instruction carefully before starting the work. It is necessary to follow the contents to install Yoshimura product.

- CAUTION** Before beginning installation, let motorcycle cool down.
- CAUTION** During the work, be careful not to damage each parts. Especially, Heat Shield is coated with black paint. Handle with care not to be hit or scratched by surroundings as the coating may come off.
- CAUTION** Torque specification must be followed. If neglected, it may cause bolt and nut to fell off and damage to Yoshimura exhaust and motorcycle.

1. Product Information:

Description	KAWASAKI Z900RS/Z900RS CAFE Optional Heat Guard SET	Part Number	194-269-0010
Application model	KAWASAKI Z900RS/Z900RS CAFE	Main Material	Stainless Steel

2. Contents:

No.	Descriptions	Part No.	Q'ty	No.	Descriptions	Part No.	Q'ty
1	Heat Shield	116-269-0001	1	5	U Nut M5	820-005-0800	2
2	Heat Shield Bracket	116-269-0010	1	6	Cap Bolt M8x40	800-208-5040	1
3	Button Bolt M5x10	803-205-3010	2	7	Washer M8x16	812-108-1612	1
4	Conical Spring Washer M5	810-205-0000	2				


3. Applicable Product :

- SLIP-ON R-11 SINGLE EXIT : EEC APPROVED / Part No. 1F0-269-5W20 / -5E30 / -5E80B
- SLIP-ON R-11 SINGLE EXIT : JMCA APPROVED / Part No. 110-269-5W50 / -5E20 / -5E80 / -5E80B
- SLIP-ON R-77S : EEC APPROVED / Part No. 1F0-269-5W20 / -5E30 / -5E80B
- SLIP-ON R-77S : JMCA APPROVED / Part No. 110-269-5W50 / -5E20 / -5E80 / -5E80B
- SLIP-ON BREVIS : STREET SPORTS / Part No. 180-269-5450 / -5480 / -5480B / -5490
- SLIP-ON BREVIS : JMCA APPROVED / Part No. 110-269-5450 / -5480 / -5480B / -5490

Parts Diagram




Pay attention for the clearance when using this product with Genuine optional main stand together. It is suggested to release main stand slowly.

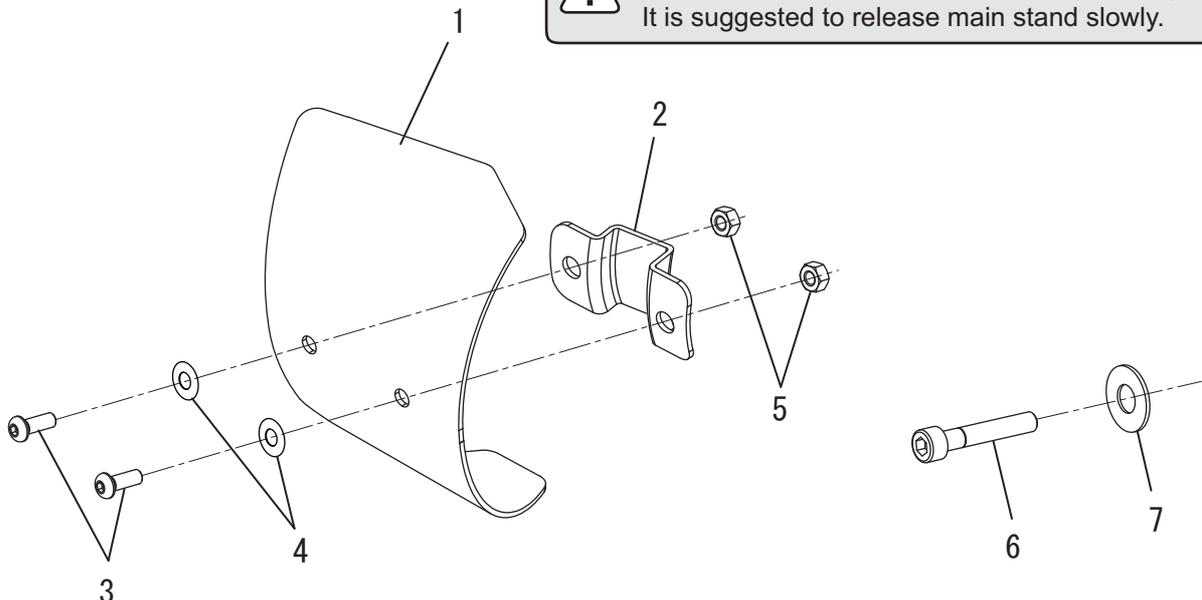


4. Installation steps:

- 1) Check that all the component parts are in hand.
- 2) According to KAWASAKI service manual, remove stock silencer from vehicle. If Yoshimura Slip-on is installed, temporary remove it.

- 3) Remove stock bolt from stock clamp band and attach Cap Bolt M8x40 and Washer M8x16 (See Fig. 1).

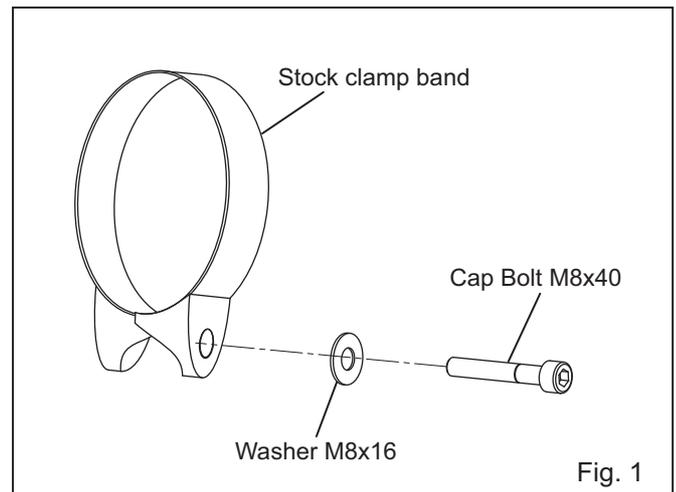

- 4) Fix Heat Guard and stock clamp band with Heat Guard Bracket, 2 of each Button Bolt M5x10, Washer M6 and U Nut M5 (See Fig. 2). Tighten bolts by hand only at this stage.

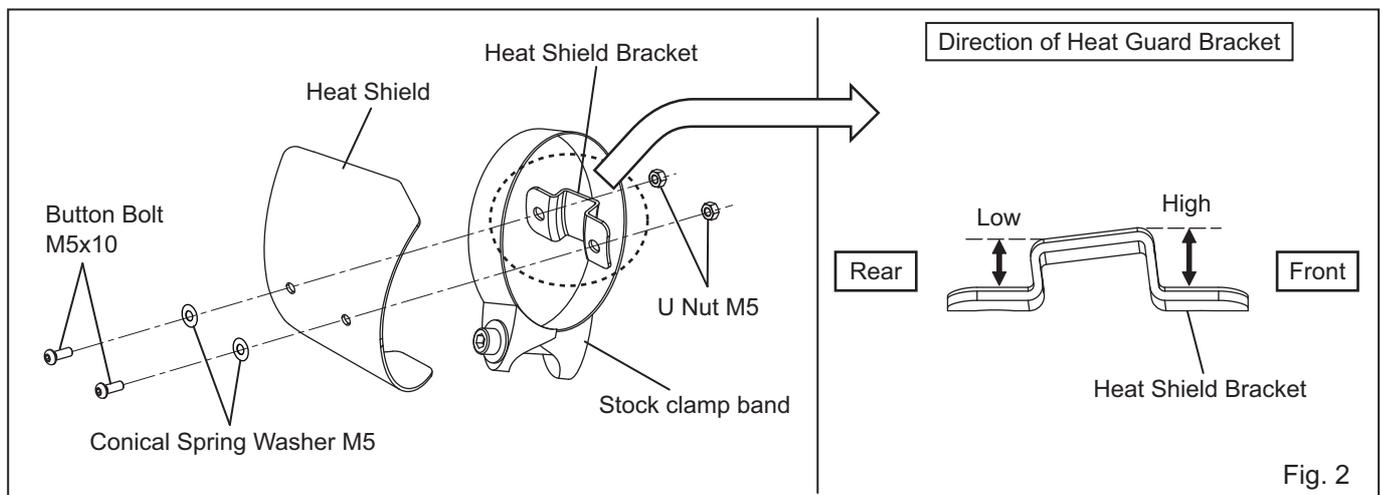

- 5) According to the instruction manual of Yoshimura Slip-on, process the installation steps.
- 6) Before tighten and torque bolts, check and adjust the position of Heat Guard as shown in following images. Then, tighten and torque 2 of Button Bolt M5x10 (See Fig. 3, 4, 5 & 6 on next page).

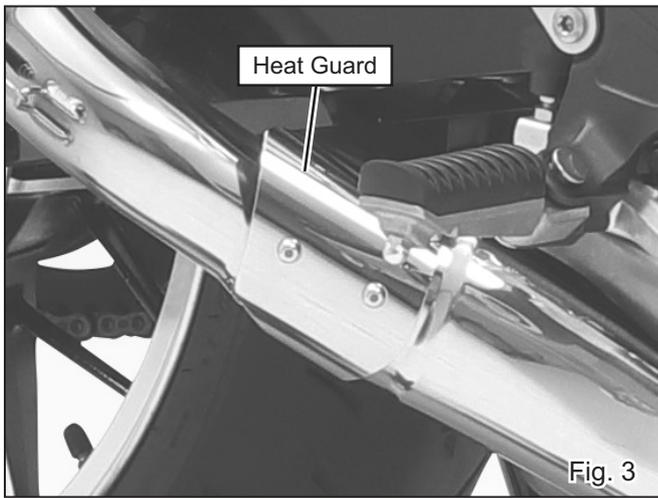


Fig. 3

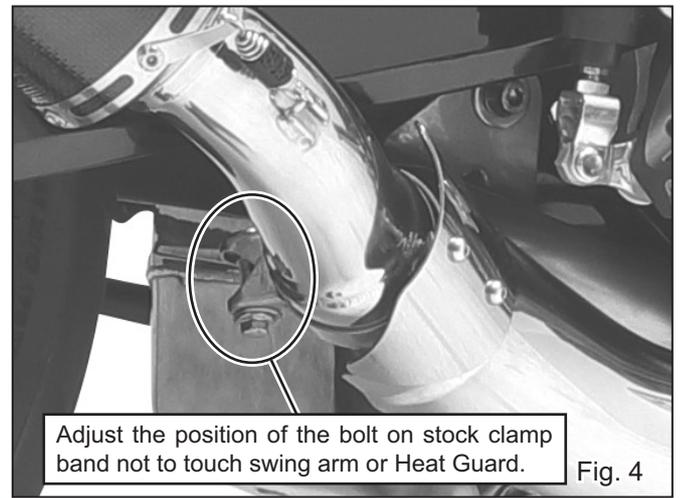


Fig. 4

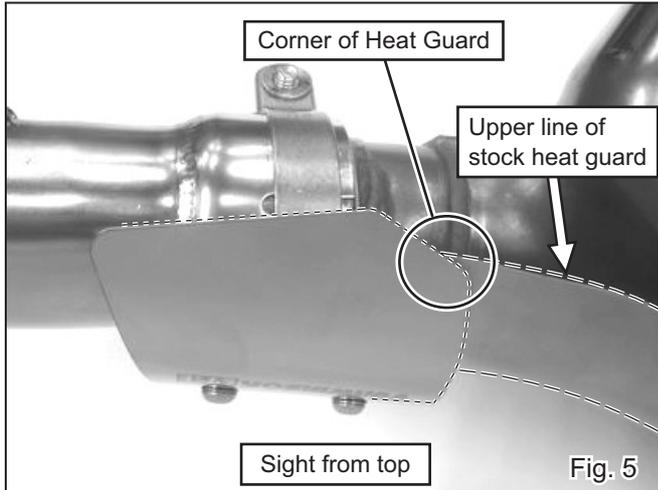


Fig. 5

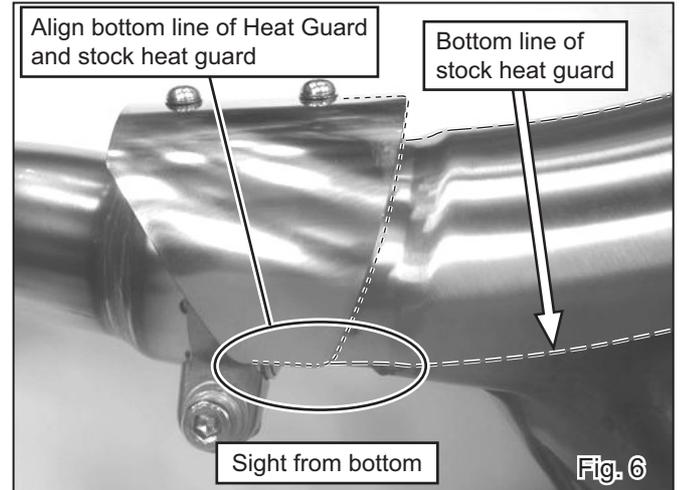


Fig. 6

7) According to the instruction manual of Yoshimura Slip-on, finish the installation.

CAUTION When using this product with Genuine optional main stand together, check for enough clearance. In case there is not enough clearance, loosen Cap Bolt M8x40 and readjust the position of Heat Shield.



- CAUTIONS AFTER INSTALLATION -

- ⊙ Check each bolt sometimes to see that there is no failure condition such as poor tightening.
- ⊙ Quality control is implemented on all products. If, however, any defect or failure is found, please notify Yoshimura Japan through the selling dealer. Necessary technical service or replacing of the product will be made.
- ⊙ Due to improvement, the specifications and price of the product are subject to change without notice.
- ⊙ For any information regarding this product, please address inquiries to Yoshimura Japan Co., Ltd.

Yoshimura Japan Co., Ltd.
 6748 Nakatsu, Aikawa, Aiko, Kanagawa 243-0303 Japan
 Web site: <http://www.yoshimura-jp.com> E-Mail: yj-world@yoshimura-jp.com