EST YOSHIMURA JAPAN CO., LTD. PRODUCT INSTALLATION INSTRUCTION MANUAL

YAMAHA YZF-R1 15- RACING MID PIPE for R-11Sq

Be sure to read the instruction carefully before starting the work. It is necessary to follow the contents to install Yoshimura product.

CAUTION Before beginning installation, let motorcycle cool down.

CAUTION Be sure not to damage each part during installation.

CAUTION Torque specification must be followed. If neglected, it may cause bolt and nut to fall off and damage to

Yoshimura product and motorcycle.

1. Product Information:

Description	YAMAHA YZF-R1 15- RACING MID PIPE for R-11Sq	Cyclone Type	Y38AS1QC2
Part Number	185-38A-5400	Weight [STD: 6.4kg]	1.8kg
Main Material	Stainless steel		


2. Applicable Model:

YAMAHA YZF-R1(15-) / YZF-R1M(15-)		
Yoshimura EEC Slip-On R-11Sq only		
<yamaha eec<="" m="" td="" yzf-r1=""><td></td></yamaha>		
Slip-On R-11Sq>	rational error ratio	
Part number : 1F0-38A-L1*G0	国 2000 日 200	
(1F0-38A-L1*G0 is applicable		
for 2017 or later models		
however it physically fits 2015-		
2016 models.)		
	Yoshimura EEC Slip-On R-11Sc <yamaha eec<br="" m="" yzf-r1="">Slip-On R-11Sq> Part number : 1F0-38A-L1*G0 (1F0-38A-L1*G0 is applicable for 2017 or later models however it physically fits 2015-</yamaha>	



3. Contents:

No.	Descriptions	Part No.	Q'ty
1	Racing Mid Pipe	185-38A-5450	1
2	Cap Bolt M8x40	800-208-5040	1
3	Washer M8x26	812-108-2600	2
4	Flange Nut M8	823-010-1250	1
5	Clamp Band 55-59	162-022-5559	2

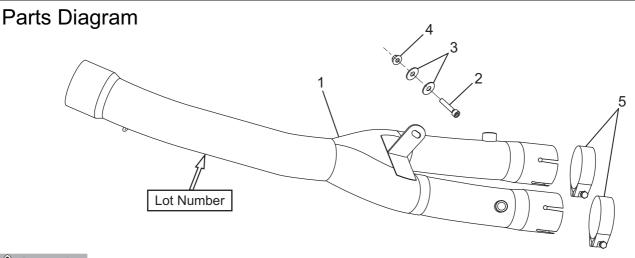

! CAUTION

In combination with Racing Mid Pipe, the EEC Approval is not valid.

A DANGER

When this Racing Mid Pipe is installed, the exhaust gas becomes leaner. It requires the readjustment of injection setting by Bazzaz Z-Fi or similar equipment. If neglected, it may cause engine damage.